

ENGEL

portable fridge-freezers

A LEGEND IN RELIABILITY

MRFD015D-A



TECHNICAL SPECIFICATION SHEET

FEATURES:


100% CFC Free
 Thermostat Controlled
 Energy Efficient Sawafuji Swing Motor
 Low DC Current Draw: 12V 3.9 Amps

Generator & Solar Panel Compatible
 Strong Construction
 Compact & Lightweight
 Noise Level: 38dB

Polypropylene Cabinet
 Polyurethane Insulation
 Carry Strap
 3 Year Manufacturers Warranty

SPECIFICATIONS:

Storage Volume:	Litres	13 Litres (14 x 375mm Cans)
Exterior Dimensions:	H x W x D	372mm x 442mm x 284mm
Interior Dimensions:	H x W x D	180mm x 350mm x 190mm
Exterior Finish:	Door	Polypropylene
	Cabinet	
Interior Finish:	Door	Polypropylene
	Cabinet	Aluminium Rollbond Evaporator
Insulation:		Polyurethane (C.F.C. Free)
Input Voltage:	AC	OPTIONAL
	DC	DC 12V
Rated Amperage:	DC	DC 12V 3.9A
Refrigerant:		Tetrafluoroethane (R-134a)
Weight:		11.5kg

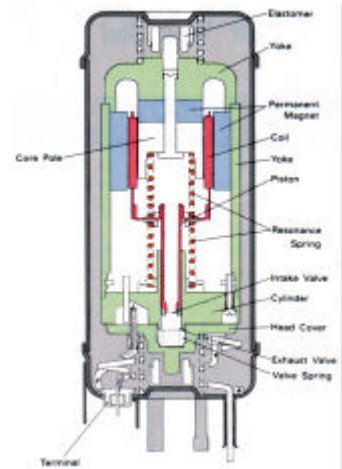

Sawafuji Swing Motor

ACCESSORIES:



Slide-lok - TSL515 & TSL015DADAPTOR



Converter 240V AC to 12V DC - ACC



12 Volt Panel - APAN / ASPAN / BPAN

